

Bass Reflex | 2-Way Ceiling Loudspeaker

Public Address Series


ø9.84" x H8.21"
7.89 lbs



C S B - 6 3 0 0

Very high quality 6.5" 2-way speaker, with a polypropylene cone, 13-ounce magnet. Fully rated for air handling spaces.

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Withstanding/Insulation Tested

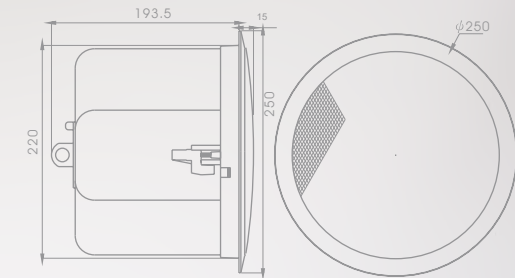

- Bass reflex design. Ported enclosure for extended bass response. Compact foreground and sound reinforcement quality.
- Rotary power selector. Removable locking connector with screw-down terminals, 2 input terminals and 2 loop-thru output terminals



SPECIFICATION

Rated Power (rms)	30W
Impedance	333Ω, 667Ω, 1.33kΩ, 2.67kΩ & 8Ω
Power Taps @ 100V	30W, 15W, 7.5W, 3.75W & 8Ω
Power Taps @ 70V	15W, 7.5W, 3.75W, 1.9W & 8Ω
SPL (1W / 1m)	89dB
Max. SPL (Rated W / 1m)	104dB
Frequency Range (-10dB)	75 Hz ~ 25k Hz
Dispersion 1k Hz / 4k Hz	140° / 75°
Operating Temperature	-30 °C ~ +60 °C
Power Selection	Selecting switch
Termination	Removable locking connector with screw-down terminals, 2 input terminals and 2 loop-thru output terminals
Material	Baffle: High Impact ABS, Backcan: Steel
Colour / Finish	White
Dimensions	Dia. 250 X H 208.5 mm.
Cutout Size	Dia. 220 mm.
Net Weight (ea)	3.58 kg
Mounting	Rotating mount tabs