






WSC-2100

with control software

Professional server

1 pcs

- Synchronizes with DPS main controller, showing all broadcast status simultaneously.
- Emergency call and access control records can be shown and edited.
- Supports multi-computer simultaneous control and sound transmission via Internet/ Intranet.

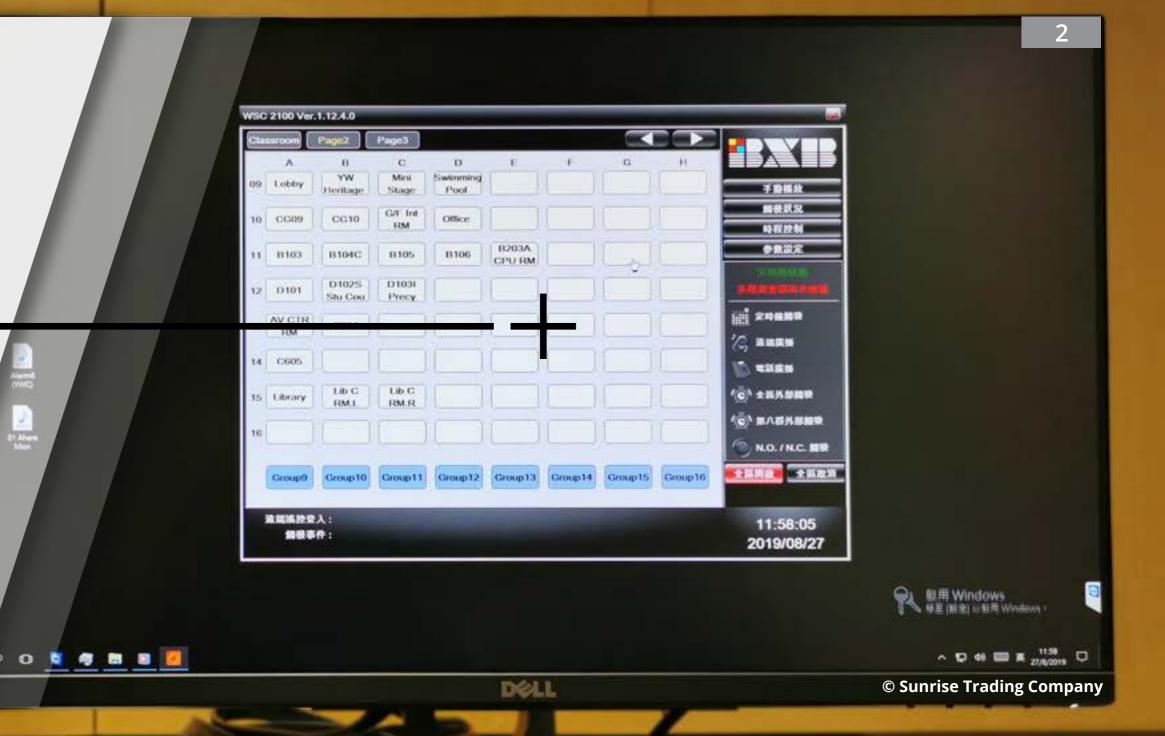


Ying Wa College



IIXII WM

WMP-2100

DIGITAL PUBLIC ADDRESS SYSTEM

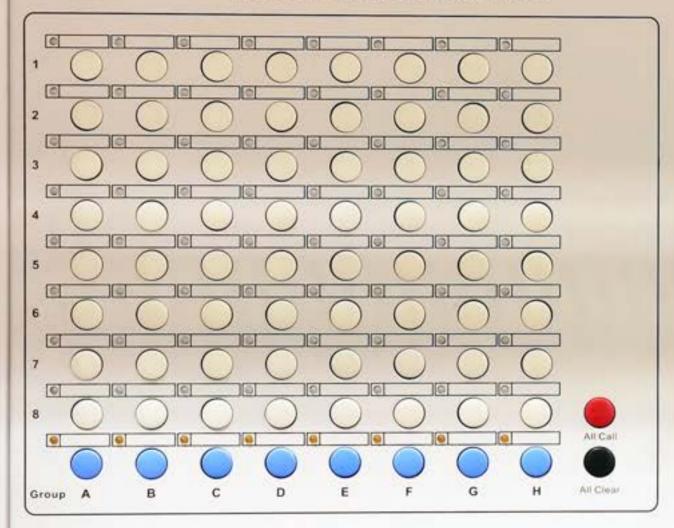









WMP-2100

Digital PA System

- It is adopted with Digital Two-Way Transmission system. With One Single Cable connection, it not only saves the installation time, but also makes the installing easier and repairing quicker.
- It has 64 single area keys, 8 group keys, 1 ALL CALL key and 1 CLEAR key. There is space on the top of each key for users to make notes.
- It is equipped with 8CH Input Mixer: 4 Mics Input, 4 Aux Input, 4 Sound Input & Separate/ Master Volume Controls& 1 Group of Base & Tremble Volume Controls.




X1222USB

Analog Mixing Console

The compact XENYX X1222USB mixer allows you to effortlessly achieve premium-quality sound. Channels 1 - 4 feature our XENYX Mic Preamps, renowned for their pristine performance, plus 2 of the 4 stereo channels accept XLR inputs, as well as Line-Level sources.



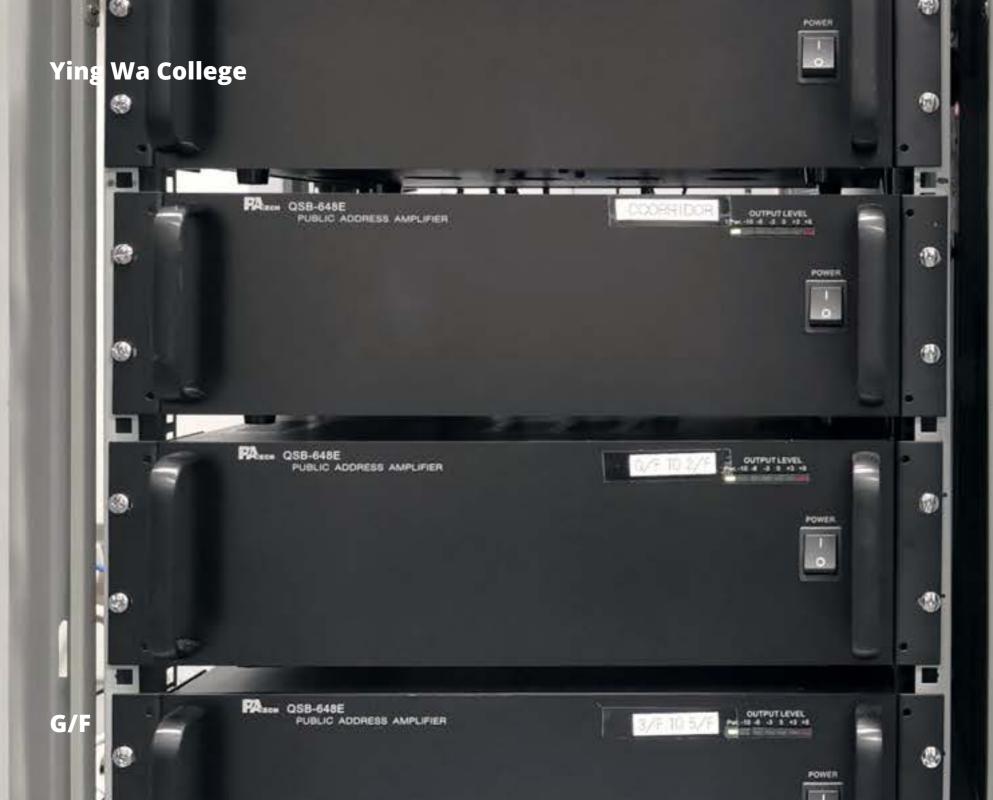

PATECH

QSB-648E

Public Address Amplifier

QSB-6xxE series is easy to use booster amplifier. It has one phone jack and one XLR jack as input; and the same as output. And there is one screw speaker output terminal for the direct connection to 8 ohm, or 70V, or 100V speaker. There is only one set of LED as power on and level indicators on the front panel.















Bi-Directional Sound Projector



✓ CE Certified(EMC & LVD)

IP Rated

Rustproof

EASE Data

RoHS Compliance

UV Protected

☑ Withstanding/Insulation Tested

G/F~6/F


















MUH-6300

Music Horn Loudspeaker



- **✓** 100 Hours Life Tested
- ✓ CE Certified(EMC & LVD)
- **✓** IP Rated
- **N** Rustproof
- **E**ASE Data
- **▼** RoHS Compliance
- **✓** UV Protected
- **✓** Withstanding/Insulation Tested















- COS-3300
- Column Loudspeaker

- Durable extruded aluminium housing and attractive slimline construction.
 Water protected to IEC529 IP66, suitable for indoor and outdoor use.
- Fitted with high specification driver units / tweeter for exceptional speech & music reproduction.
- Available in 10 20 30 & 40 watt options and multi impedance 100V, 70V & 8Ω. High quality rotary power and tappings selector (suffix "B") or 6 way power cord (no 8Ω).

© Sunrise Trading Company









Q-430T
Cabinet Wall-mount Speaker

PRICE VALUE