

IP-66 Water-proof | Column Loudspeaker

Public Address Series

L30.31" x W4.49" x D3.78"
12.35 lbs




C O S - 3 3 0 0

Ingress Protection (IP) ratings are developed by the European Committee for Electro Technical Standardization (CENELEC) (described IEC/EN 60529) to specify the environmental protection an enclosure provides.

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ IP Rated
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Rustproof
- ✓ UV Protected
- ✓ Withstanding/Insulation Tested

- Ingress protected to IEC 529 IP 66, suitable for indoor and outdoor use. Durable aluminium alloy multi bracket broken tested up to 1500 kg
- Fitted with high specification driver units / tweeter for exceptional speech & music reproduction. Available in 30 watt.
- Suitable for accurate, "long throw" applications.- Durable extruded aluminium housing. Attractive slimline construction.

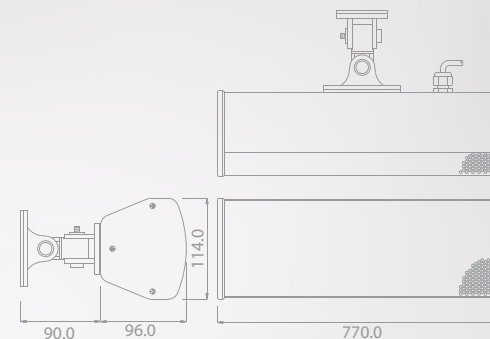

SPECIFICATION

Rated Power (rms)	30 W
Number of Loudspeakers	3.5" Woofer x 6 + 3.25" Tweeter x 1
Impedance	167Ω, 333Ω, 667Ω, 1.33kΩ & 2.67kΩ
Power Taps @ 100V	30W, 15W, 7.5W & 3.75W
Power Taps @ 70V	30W, 15W, 7.5W, 3.75W & 1.9W
SPL (1W / 1m)	93 dB
Max. SPL (Rated W / 1m)	108 dB
Frequency Range (-10dB)	110 Hz ~ 20 kHz
Dispersion 1k Hz / 4k Hz	H : 190° / 90° , V : 40° / 30
Operating Temperature	-20 °C ~ +60 °C
Ingress Protection	IEC 529, IP 66
Power Selection	6 - core cable
Material	Housing: Extruded Aluminium Grille: Aluminium
Colour / Finish	White (RAL 9003)
Dimensions	L 770 x W 114 x D 96 mm
Net Weight (ea)	5.6 kg
Mounting	Aluminium alloy multi bracket