

Bass Reflex | 2-Way Ceiling Loudspeaker

Public Address Series

Ø9.84" x H8.21"


6.88 lbs



C S B - 6 6 0 8

Very high quality 6.5" 2-way speaker, with a polypropylene cone, 13-ounce magnet. Fully rated for air handling spaces.

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Withstanding/Insulation Tested

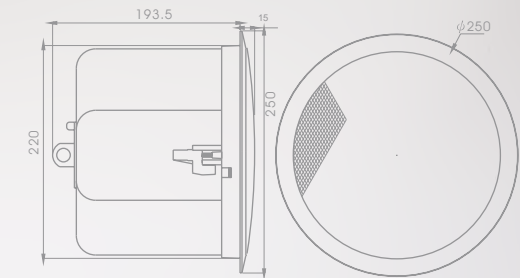

- Bass reflex design. Ported enclosure for extended bass response. Compact foreground and sound reinforcement quality.
- Removable locking connector with screw-down terminals, 2 input terminals and 2 loop-thru output terminals

© Sunrise Trading Company



SPECIFICATION

| | |
|--------------------------|---|
| Rated Power (rms) | 60W |
| Impedance | 8Ω |
| SPL (1W / 1m) | 89dB |
| Max. SPL (Rated W / 1m) | 107dB |
| Frequency Range (-10dB) | 75 Hz ~ 25k Hz |
| Dispersion 1k Hz / 4k Hz | 140° / 75° |
| Operating Temperature | -30° C ~ +60° C |
| Termination | Removable locking connector with screw-down terminals, 2 input terminals and 2 loop-thru output terminals |
| Material | Baffle: High Impact ABS, Backcan: Steel |
| Colour / Finish | White |
| Dimensions | Dia. 250 X H 208.5 mm. |
| Cutout Size | Dia. 220 mm. |
| Net Weight (ea) | 3.12 kg |
| Mounting | Rotating mount tabs |