

IP-66 | Plastic Horn Loudspeaker

Dia.6.15" x L8.67"
3.40 lb


P R H - 6 1 0 1

Built-in line transformer with screwdriver adjustable power selector (sealed)

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ IP Rated
- ✓ Rustproof
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ UV Protected
- ✓ Withstanding/Insulation Tested

- Stainless steel mounting bracket & exterior hardware
- Rotary power selector
- High impact ABS construction

© Sunrise Trading Company

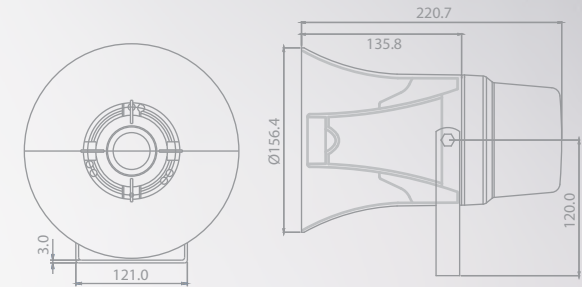

SPECIFICATION

Rated Power (rms)	10W
Impedance	1kΩ, 2kΩ, 4kΩ, 8kΩ, OFF & 8Ω
Power Taps @ 100V	10W, 5W, 2.5W, 1.25W, OFF & 8Ω
Power Taps @ 70V	5W, 2.5W, 1.25W, 0.625W, OFF & 8Ω
SPL (1W / 1m)	106 dB
Max. SPL (Rated W / 1m)	116 dB
Frequency Range (-10dB)	380 Hz ~ 9k Hz
Frequency Range (-20dB)	340 Hz ~ 11k Hz
Dispersion 1k Hz / 4k Hz	210° / 45°
Operating Temperature	-30° C ~ +60° C
Ingress Protection	IEC 529 IP 66
Power Selection	Selecting switch
Material	Housing: High impact ABS
Colour / Finish	Grey
Dimensions	156.4 Dia. x L 220.7 mm
Net Weight (ea)	1.54 kg
Mounting	U Type stainless steel bracket