

IP-66 | Plastic Horn Loudspeaker

Dia.8.33" x L10.60"

3.84 lb


P R H - 8 1 5 1

Built-in line transformer with screwdriver adjustable power selector (sealed)

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ IP Rated
- ✓ Rustproof
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ UV Protected
- ✓ Withstanding/Insulation Tested

- Stainless steel mounting bracket & exterior hardware
- Rotary power selector
- High impact ABS construction

© Sunrise Trading Company

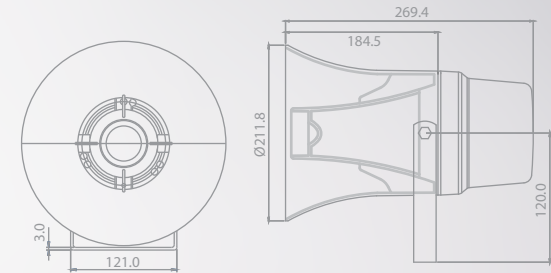

SPECIFICATION

Rated Power (rms)	15W
Impedance	667Ω, 1.33kΩ, 2.67kΩ, 5.33kΩ, OFF & 8Ω
Power Taps @ 100V	15W, 7.5W, 3.75W, 1.87W, OFF & 8Ω
Power Taps @ 70V	7.5W, 3.75W, 1.87W, 0.94W, OFF & 8Ω
SPL (1W / 1m)	108dB
Max. SPL (Rated W / 1m)	120dB
Frequency Range (-10dB)	460 Hz ~ 9k Hz
Frequency Range (-20dB)	300 Hz ~ 11k Hz
Dispersion 1k Hz / 4k Hz	120° / 30°
Operating Temperature	-30 °C ~ +60 °C
Ingress Protection	IEC 529 IP 66
Power Selection	Selecting switch
Material	Housing: High impact ABS
Colour / Finish	Grey
Dimensions	Dia. 211.8 x L 269.4 mm
Net Weight (ea)	1.74 kg
Mounting	U Type stainless steel bracket