

Voice Alarm | Quick-Mount Ceiling Loudspeaker

Ø9.06" x H5.0"
4.4 lbs

QCM-6061VAF

Compliant with British Standard BS 5839 part 8 and EN 60849

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ BS 5839 Part 8
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Withstanding/Insulation Tested

Side




Top



- Mild steel construction capable of withstanding temperature of 650°C
- 150°C thermal isolating fuse
- Fitted with a 6.5" twin cone driver unit

© Sunrise Trading Company

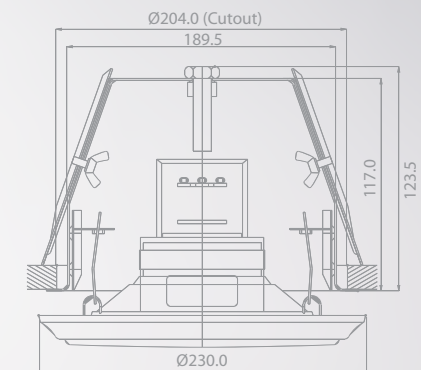

SPECIFICATION

Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, 6.67kΩ & 13.33kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 0.75W
Power Taps @ 70V	3W, 1.5W, 0.75W & 0.375W
SPL (1W / 1m)	93dB
Max. SPL (Rated W / 1m)	100dB
Frequency Range (-10dB)	100 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	120° / 90°
Operating Temperature	-30°C ~ +60°C
Power Selection	Plug
Material	Baffle: Steel, Grille: Steel
Colour / Finish	White
Dimensions	Ø230 x H 134 mm
Cutout Size	Ø205 mm
Net Weight (ea)	2 kg
Mounting	Spring loaded Quick-Mount assembly