

Quick Mount 2-Way Ceiling Loudspeaker

Public Address Series

Ø9.06" x H4.76"

3.75 lbs




Q C M - 6 0 8 1 T

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Withstanding/Insulation Tested

REAR



- Featuring a high quality 6.5" 2-way speaker, with a paper cone, 10-ounce magnet and 2" tweeter with a bi-polar crossover.
- Foreground and sound reinforcement quality. Dished grille design for acoustic integrity.

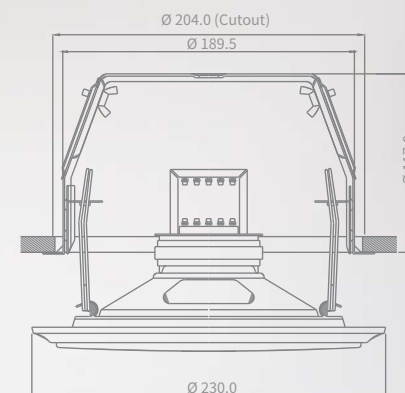

SPECIFICATION

Rated Power (rms)	8W
Impedance	1.25kΩ, 2.50kΩ, 5kΩ & 10kΩ
Power Taps @ 100V	8W, 4W, 2W & 1W
Power Taps @ 70V	4W, 2W, 1W & 0.5W
SPL (1W / 1m)	95dB
Max. SPL (Rated W / 1m)	104dB
Frequency Range (-10dB)	80 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	140° / 65°
Operating Temperature	-30° C ~ +60° C
Power Selection	Plug
Material	Baffle: Steel, Grille: Steel
Colour / Finish	White
Dimensions	Dia. 230 X H 121 mm
Cutout Size	Dia. 205 mm
Net Weight (ea)	1.7 kg
Mounting	Spring loaded Quick-Mount bracket assembly