

IEC529 IP-55 | Splash-proof Ceiling Loudspeaker

Public Address Series

Ø9.39"x L5.41"
4.44 lbs




S C P - 6 1 2 1

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ IP Rated
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Rustproof
- ✓ UV Protected
- ✓ Withstanding/Insulation Tested



- 6" full range polypropylene driver unit. Sealed ABS rear enclosure with glanded cable tail. Rotating mount tabs for easy installation.
- Suitable for non-shedding, "clean-room" environments. Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms.

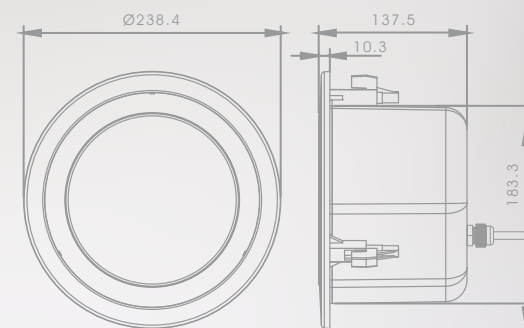

SPECIFICATION

Rated Power (rms)	12W
Impedance	1.11kΩ, 1.67kΩ, 3.33kΩ, 10kΩ & 8Ω
Power Taps @ 100V	12W, 9W, 6W, 3W & 8Ω
Power Taps @ 70V	6W, 4.5W, 3W, 1.5W & 8Ω
SPL (1W / 1m)	91dB
Max. SPL (Rated W / 1m)	102dB
Frequency Range (-10dB)	130HZ-20KHZ
Dispersion 1k Hz / 4k Hz	220° / 65°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC529 IP55
Power Selection	6-core cable
Material	ABS
Colour / Finish	White (RAL9016)
Dimensions	Dia. 238.4 x L 137.5 mm
Net Weight (ea)	2 kg
Mounting	Rotating mount tabs