

IEC529 IP-66 | Sound Projector

Public Address Series


Ø5.75" x L8.00"

4.41 lbs



S O P - 5 2 0 0

- ✓ 100 Hours Life Tested
- ✓ CE Certified (EMC & LVD)
- ✓ IP Rated
- ✓ EASE Data
- ✓ RoHS Compliance
- ✓ Rustproof
- ✓ UV Protected
- ✓ Withstanding/Insulation Tested

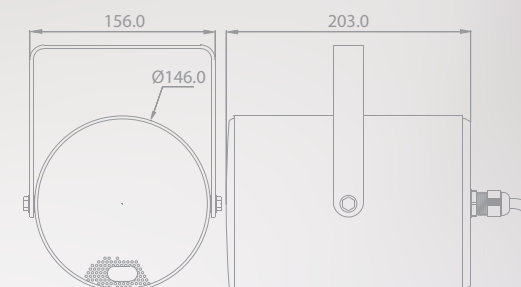

REAR



- Ingress protected to IEC 529 IP 66. High impact ABS housing with UV stable.
- Designed to give controlled directional sound characteristics. Ideal for music and speech applications.



SPECIFICATION

Rated Power (rms)	20W
Impedance	250Ω, 500Ω, 1kΩ, 2kΩ & 4kΩ
Power Taps @ 100V	20W, 10W, 5W & 2.5W
Power Taps @ 70V	20W, 10W, 5W, 2.5W & 1.25W
SPL (1W / 1m)	93 dB
Max. SPL (Rated W / 1m)	106 dB
Frequency Range (-10dB)	140 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	-30° C ~ +60° C
Operating Temperature	75° : 75° / 50° : 50°
Ingress Protection	IEC529 IP-66
Power Selection	6 - core cable
Material	Housing: High impact ABS, Grille: Aluminium
Colour / Finish	White
Dimensions	Dia. 146 X L 203 mm
Net Weight (ea)	2 kg
Mounting	U Type aluminium bracket