


應用範圍 Application 

- ▶ 娛樂包房補聲音箱、家庭影院主擴及環繞音箱、會議室主擴聲音箱、控制室監賞音箱
- ▶ Entertainment room, Home cinema, Meeting room, Control room.

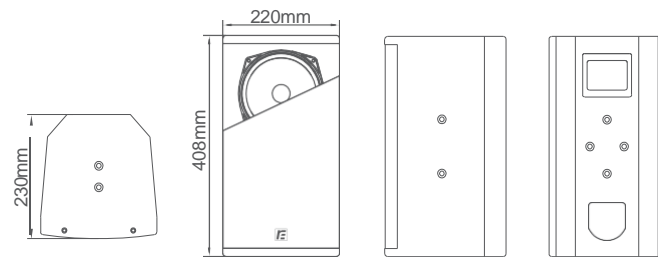
產品特性 Features 

▶ CF系列同軸音箱採用緊湊的梯形箱體設計，全新處理的鈦振膜高音，同時滿足了金屬聽感和高功率失真，音質細膩優美。高低音喇叭單元為同軸結構設計，有效解決了常規音箱單元間的傳輸路徑差問題，近場聽感音色均勻一致；鋁質號筒和低音紙盆結合，組成一個近場、寬角的指數型高音號筒，覆蓋角達到80°（H）×80°（V）的寬指向角度；採用最新的小波分析技術，優化了分頻器和單元結構，使高低頻聲音同時到達。

▶ 箱體配套隱藏M8吊掛點，用於固定安裝和流動應用中吊掛和調節角度，並在音箱底部有一個35mm的支架。箱體採用5mm和15mm的優質樺木夾板構成，結實、防潮，表面為褐色耐磨的流動演出級專利點紋水性漆；採用全新鐵網壓條工藝，簡單易用的吊掛配件結構；後接線板兩個接線柱紅正黑負方便連接。

▶ CF is a coaxial loudspeaker, which adopts a compact trapezoidal box design and the newly processed titanium diaphragm HF meets the requirements of metal listening, high power as well as distortion. The HF/LF driver is designed with coaxial structure, which effectively to cope with the problem of transmission path difference between conventional speaker. The coverage rate is 80° (H) × 80° (V). Meanwhile, the frequency divider and unit structure are optimized to make HF and LF sound arrived at the same time.

▶ Hidden a rigging points for fixed installation and portable application and there is a 35mm bracket at the bottom of the speaker. Precision-made 5mm and 15mm baltic birch plywood cabinet is completed with durable paint and wedge-bonded for an additional strength and rigidity.

產品尺寸 Product dimension 

CF26

參數規格 Specifications 

系統類型	雙6寸同軸全頻音箱
靈敏度(1W/1m)	93dB
頻率回應	60Hz~20kHz
額定功率(AES)	200W
最大聲壓級(連續/峰值)	116dB/122dB
標稱覆蓋角(H×V)	80°×80°
標稱阻抗	8Ω
低音單元	1×6寸同軸單元/1×6寸被動單元
高音單元	/
連接插座	紅正/黑負接線座
吊掛硬體	10×M8 的吊掛點
尺寸(H×W×D)	408×220×230mm
重量	7.5kg

System type	Dual 6" Coaxial Full Range Speaker
Sensitivity(1W/1m)	93dB
Frequency response	60Hz~20kHz
Power rating(AES)	200W
SPL(continue/peak)	116dB/122dB
Nominal Impedance	80°×80°
Dispersion(H×V)	8Ω
LF	1×6" coaxial unit/1×6" passive unit
HF	/
Connectors	Red for positive ,black for negative
Fittings	10×M8 rigging point
Dimension(H×W×D)	408×220×230mm
Net weight	7.5kg